


## Installation instructions Triumph Tiger 1200 > 2018

- Disassemble the windshield and carefully set it aside.
- Remove the central screw of the windshield adjustment from the support underneath.
- Now remove the plastic cover under the carrier. To do this, remove the two screws and slide the plastic cover down (a little force is required).
- Screw the supplied bracket onto the dashboard from above. To do this, leave the two rubber parts in the elongated holes.  
Insert the screws from above through the angle and the rubber and tighten from below with the large washers and nuts.

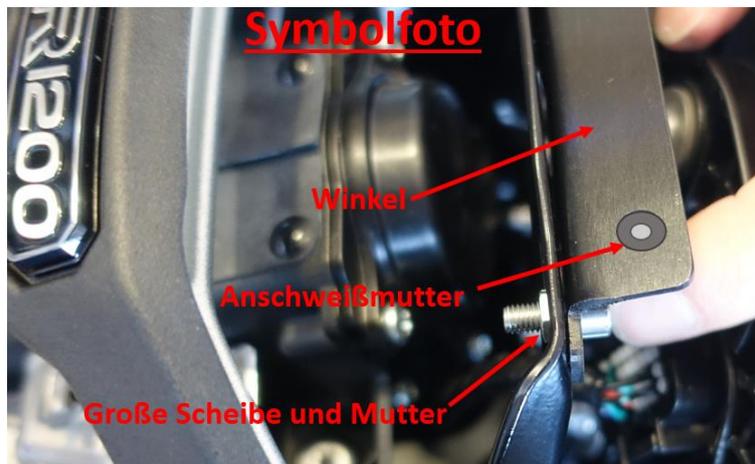


- Now mount our holder instead of the removed plastic cover.  
First attach the enclosed M5x30 screws in the lower two holes and then use the M5x12 screws on the top of the holder to fix into the bracket.

turn the page ...

- Temporarily screw the navigation docking station to the holder and mount the swiveling adapter plate at the desired height.

Adapter plate can be turned 180 degrees



- Reassemble the windshield beforehand Lay the connection cable. Through the upper slots in our holder you can fix the cable with cable ties.
- Make sure there is enough space in all positions for height adjustment from the window to the navigation system. We do not know what happens when the actuator when it gets in contact with your device and we accept no liability for it!
- Finally, adjust the angle of inclination for the attached navigation system and tighten the screws of the friction hinges as desired (adjustable or fixed) on the left and right as evenly as possible

Have a good trip at all times ...